

Multi-mode 155Mbps 1300nm 2X5 SFF Transceiver

Features

- LC duplex receptacle
- Standard 2 x 5 footprint
- 1300nm LED transmitter
- AC or DC coupled LVPECL/PECL compatible data input and output
- Transmitter disable input
- PECL or TTL signal detect output
- Single 3.3V or 5V power supply
- 100Base-FX Compliant



Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit
Transmitter						
Data Rate (NRZ)		B	10	155	200	Mb/s
Optical Output Power (avg.) ⁽¹⁾⁽²⁾⁽⁴⁾		P _o	-19	-	-	dBm
Extinction Ratio		ER	8.3	-	-	dB
Optical Wavelength		λ _c	1260	1300	1350	nm
Spectral Width		Δλ	-	140	200	nm
Output Rise Time (10-90%)		t _r	-	-	3	ns
Output Fall Time (10-90%)		t _f	-	-	3	ns
Data Input ⁽⁹⁾	DC Coupled	V _{IL} V _{IH}	V _{CC} -1.810 V _{CC} -1.165	- -	V _{CC} -1.475 V _{CC} -0.880	V V
	AC Coupled (Differential)	V _I	0.25	-	1.6	V
Tx Disable Input		V _{DIL} V _{DIH}	0 2	- -	0.8 V _{CC}	V V
Supply Voltage		V _{CC}	3.10 4.75	3.3 5.0	3.50 5.25	V V
Supply Current		I _{CC}	-	-	110	mA
Receiver						
Data Rate (NRZ)		B	10	155	200	Mb/s
Optical Input (avg.) Sensitivity ⁽¹⁾⁽⁴⁾		P _{IN}	-	-35	-32	dBm
Optical Wavelength		λ	1250	1300	1650	nm
Output Rise Time (10-90%)		t _r	-	1.3	2.5	ns
Output Fall Time (10-90%)		t _f	-	1.6	2.5	ns
Data Output ⁽⁹⁾	DC Coupled	V _{OL} V _{OH}	V _{CC} -1.840 V _{CC} -1.045	- -	V _{CC} -1.62 V _{CC} -0.88	V V
	AC Coupled (Differential)	V _I	0.6	-	1.8	V
Signal Detect Asserted (avg.)		P _A	-	-	-32	dBm
Signal Detect Deasserted (avg.)		P _D	-45	-	-	dBm
Hysteresis		P _{HYS}	-	3	-	dB
Supply Voltage		V _{CC}	3.10 4.75	3.3 5.0	3.50 5.25	V V
Supply Current		I _{CC}	-	-	100	mA

Notes :

Multi-mode 155Mbps 1300nm 2X5 SFF Transceiver

- (1) With 0.275 NA, 62.5/125 μ m fiber.
- (2) Driven with a differential signal.
- (3) Eye mask diagram is compliant to ITU-T G.957 Eye Diagram.
- (4) 2²³-1 PRBS, BER= 10⁻¹⁰.
- (5) Compatible with LVPECL and PECL logic levels.
- (6) The transmitter output should not be viewed directly.

Absolute Maximum Ratings

Parameter		Min.	Max.	Unit
Operating Temperature	-1	0	70	°C
	-2	-40	85	°C
Storage Temperature		-40	100	°C
Lead Soldering Limits		-	240/10	°C /sec
Supply Voltage	5V	-0.2	7	V
	3.3V	-0.2	4	V

Ordering Information

T R 1 3 M M 1 - 1 S L C A R 1

Operating Temperature Range :

1 : 0 ~ 70°C

2 : -40 ~ 85°C

Data Coupling & SD Output Level :

Symbol	Tx Coupling	Rx Coupling	SD
C	AC	DC	PECL
D	AC	DC	TTL
E	AC	AC	PECL
F	AC	AC	TTL
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

Supply Voltage :


5 : 5V

3 : 3.3V

Multi-mode 155Mbps 1300nm 2X5 SFF Transceiver

Outline Drawing

2*5

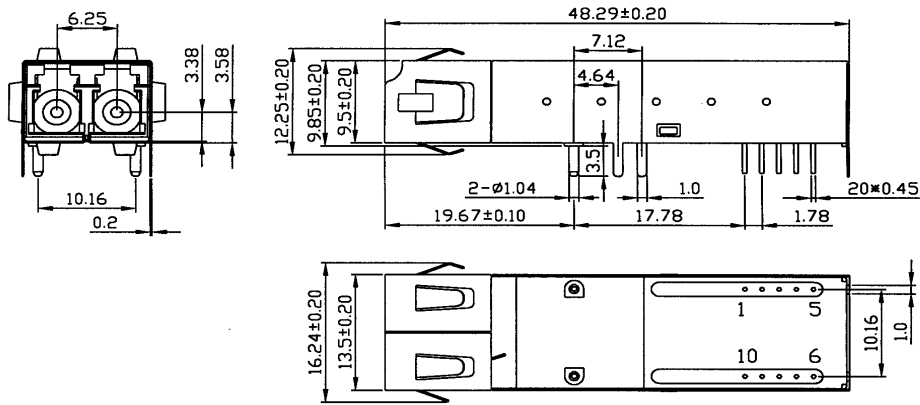

UNIT : mm


Pinout Description

Pin No.	Symbol	Description
1	V_{EER}	Receiver Ground
2	V_{CCR}	Receiver Power Supply (5V/3.3V)
3	SD	Receiver Signal Detect
4	RD-	Receiver Data Out (Inverted)
5	RD+	Receiver Data Out
6	V_{CCT}	Transmitter Power Supply (5V/3.3V)
7	V_{EET}	Transmitter Ground
8	TDis	Input Logic Low Level to Switch Transmitter "ON" Input Logic High Level to Switch Transmitter "OFF"
9	TD+	Transmitter Data in
10	TD-	Transmitter Data In (Inverted)

Multi-mode 155Mbps 1300nm 2X5 SFF Transceiver

Application Notes

Recommended AC Coupling Interface Circuit :

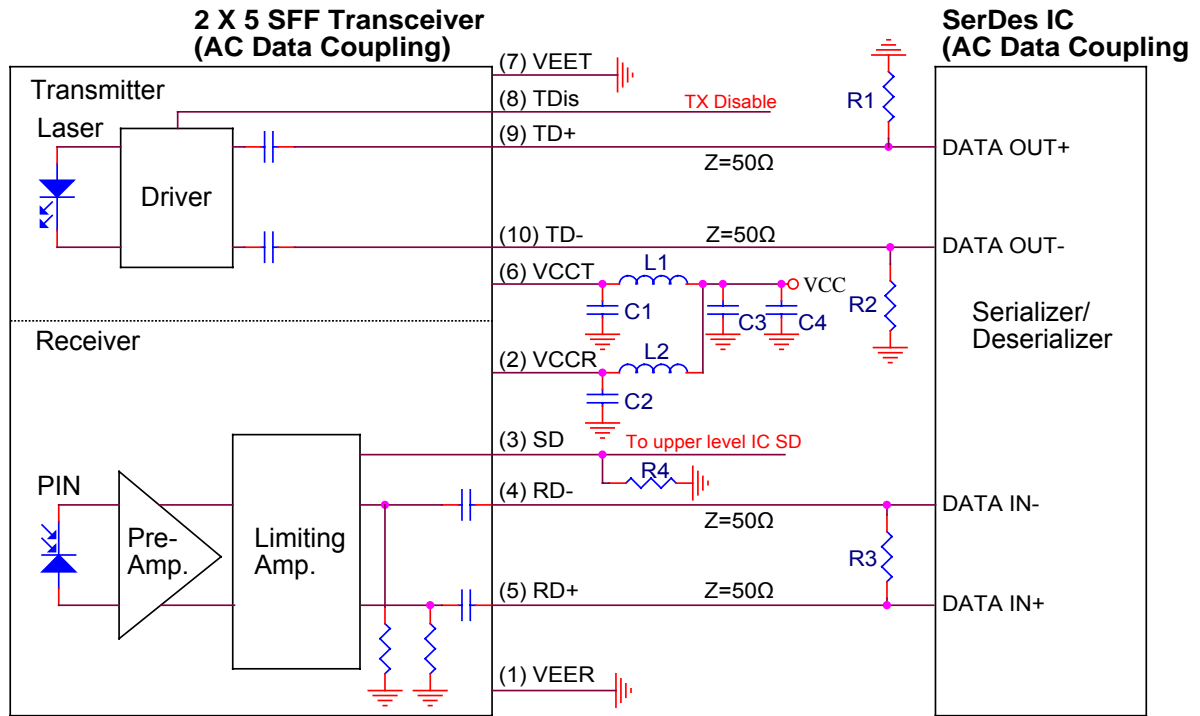


$L1=L2=1\mu\text{H}$ or ferrite bead
 $C1=C2=C3=0.1\mu\text{F}$
 $C4=10\mu\text{F}$
 $R1, R2, R3$ depends on SerDes IC specification.
 (Consult the SerDes IC application information)
 $R4=510\Omega$

NOTE :
 1. Transmission line characteristic impedance $Z=50\Omega$.
 2. $R1, R2, R3$ as close to SerDes IC as possible.

Multi-mode 155Mbps 1300nm 2X5 SFF Transceiver

Recommended DC Coupling Interface Circuit :

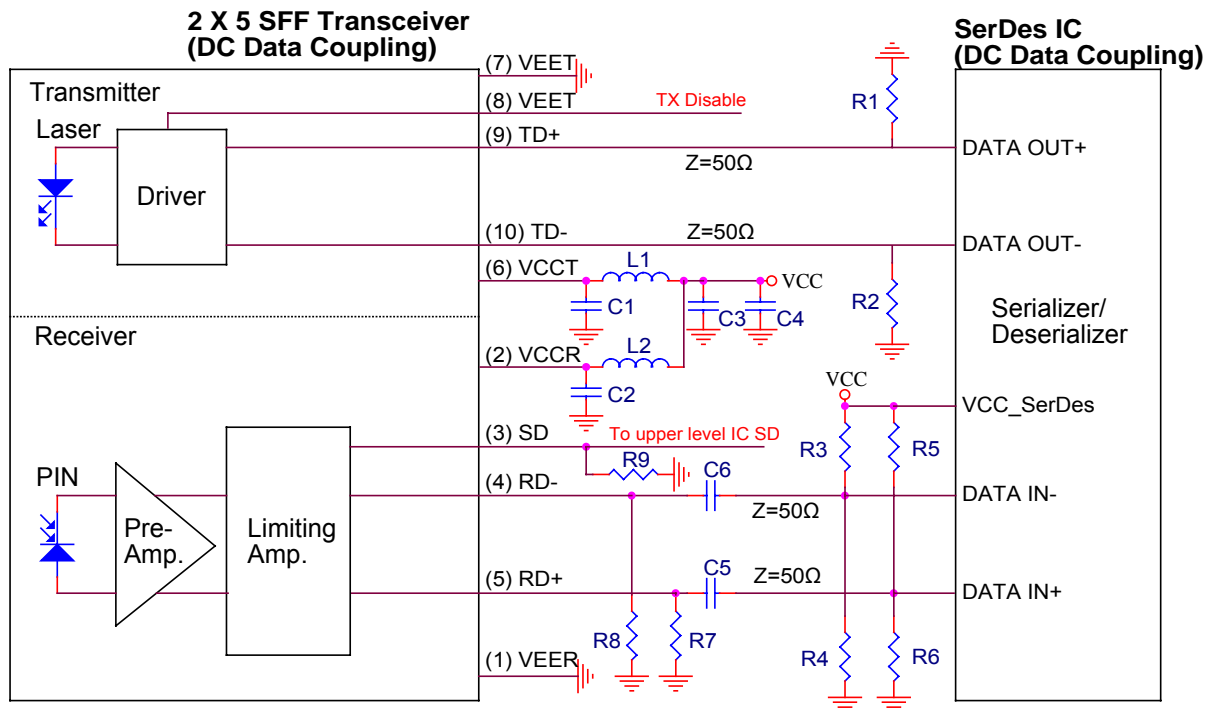

$L1=L2=1\mu\text{H}$ or ferrite bead
 $C1=C2=C3=C5=C6=0.1\mu\text{F}$
 $C4=10\mu\text{F}$
 $R1, R2, R3, R4, R5, R6$ depends on SerDes IC specification.
 (Consult the SerDes IC application information)
 $R7=R8=270\Omega$ ($VCC=3.3\text{V}$)
 $=510\Omega$ ($VCC=5\text{V}$)
 $R9=510\Omega$

NOTE :
 1. Transmission line characteristic impedance $Z=50\Omega$.
 2. $R1, R2, R3, R4, R5, R6$ as close to SerDes IC as possible.
 3. $R7, R8$ as close to 2X5 Transceiver as possible.

Appointech, Inc.
 6F-2, NO.192 Tung-Kuan Rd.,
 Hsinchu, Taiwan, R.O.C.
 TEL : 886-3-573-8478
 FAX : 886-3-573-8441
 E-mail : sales@appointech.com
 http://www.appointech.com