


850nm VCSEL MM Module

Features

- High coupled power
- Peak wavelength 850nm
- Low threshold current 3mA
- High speed t_r , $t_f < 0.3ns$
- Operating temperature range $0^{\circ}C$ to $70^{\circ}C$
- Hermetically sealed To -46 package in pigtailed or receptacle housing with FC, ST or SC connector

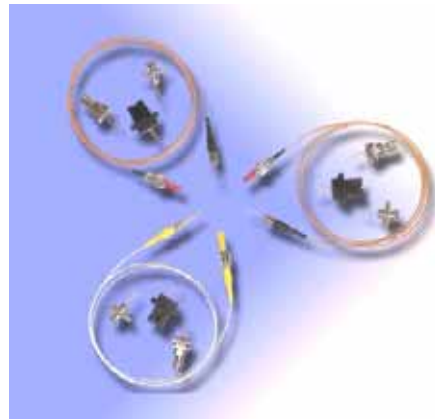

850nm VCSEL MM Module

Applications

- Gigabit Ethernet


Specifications (T=25 °C)

Parameter	Symbol	Test Conditions	Min	Typical	Max	Units
Peak wavelength	λ	$I_{op}=12mA$	830	850	860	nm
Spectral width FWHN	$\Delta\lambda$	P_0	-	-	0.85	nm
Threshold current	I_{th}	-	-	3	6	mA
Threshold current temperature variation (0 to $70^{\circ}C$)	-	-	-1	-	1	mA
Coupled power (62.5/125 μm fiber)	P_0	12mA				
-1			0.5	0.7	-	mW
-2			1			mW
Slope efficiency	SE	P_0	-	0.25	-	mW/mA
Slope efficiency temperature dependence	SE	P_0	-	-0.15	-	%/ $^{\circ}C$
Monitor Current (PD)	I_m	P_0	0.03	0.1	-	mA
Forward voltage	V_f	P_0	1.7	1.9	2.2	V
Series Resistance	R_s	P_0	-	30	-	Ω

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Continuous forward current (LD)	I_{op}	-	15	mA
Continuous reverse voltage (LD)	V_{RL}	-	10	V
Operating temperature	T_o	0	85	$^{\circ}C$
Storage temperature	T_{stg}	-40	100	$^{\circ}C$
Lead soldering temperature (10 sec)	T_L	-	260	$^{\circ}C$



Ordering Information

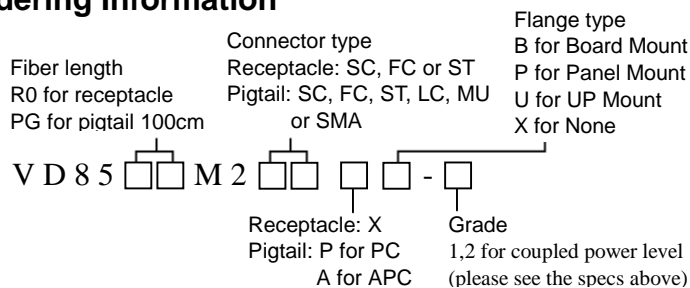

850nm VCSEL MM Module


Pin Connections

BOTTOM VIEW



Dimension

Pigtail Type

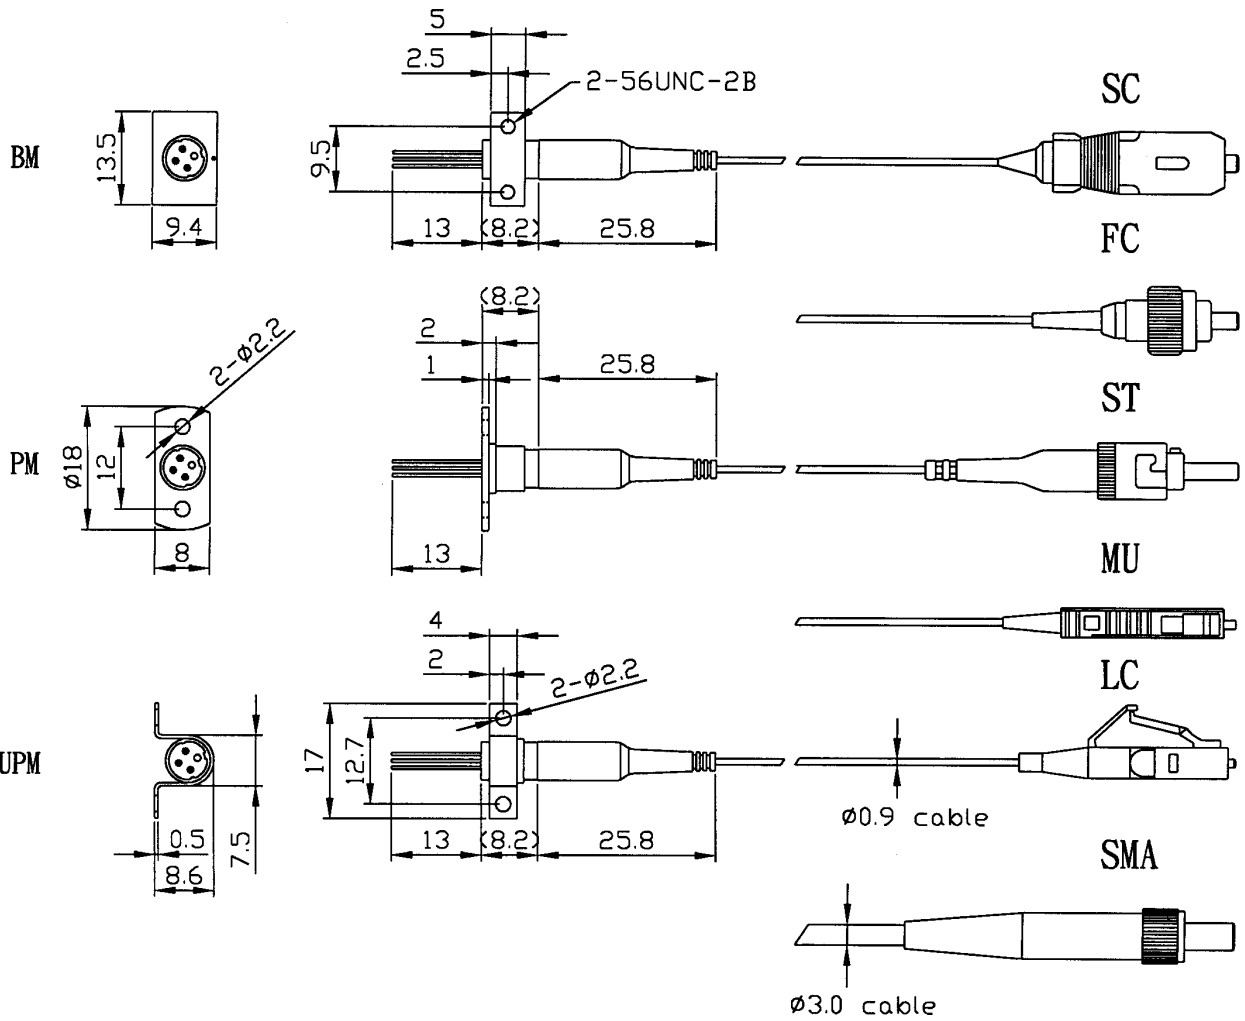

850nm VCSEL MM Module

Receptacle Type

850nm VCSEL MM Module

