

1.25Gbps Multimode Single Fiber Bi-Directional Optical Transceiver

Features

- Industrial standard 1x9 pin footprint
- Application wavelength 1310nm / 850nm
- Single SC/ST/FC connector interface
- Receiver signal detect function
- Wide dynamic rang receiver with AGC function
- PECL/LVPECL logic interface, DC or AC coupling
- Single supply 3.3V or 5V
- Low power consumption
- RoHS



Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit
Transmitter						
Data Rate (NRZ)		B	-	1.25	-	Gbps
Optical Output Power (avg.) ^{(1) (2) (3)}	TR13R85	P_o	-6	-	-3	dBm
	TR85R13	P_o	-6	-	-3	dBm
Extinction Ratio		ER	9	-	-	dB
Optical Wavelength	TR13R85	λ	1280	1310	1340	nm
	TR85R13	λ	830	850	870	nm
Spectral Width	TR13R85	$\Delta\lambda$	-	1.0	4.0	nm
	TR85R13	$\Delta\lambda$	-	-	0.85	nm
Output Rise Time (20-80%)		t_r	-	-	260	ps
Output Fall Time (20-80%)		t_f	-	-	260	ps
Data Input ⁽⁶⁾	DC Coupled	V_{IL} V_{IH}	$V_{CC} - 1.810$ $V_{CC} - 1.165$	- -	$V_{CC} - 1.475$ $V_{CC} - 0.880$	V V
	AC Coupled (Differential)	V_I	0.25	-	1.6	V
Supply Voltage		V_{CC}	3.10 4.75	3.3 5.0	3.50 5.25	V V
Supply Current		I_{CC}	-	-	130	mA

1.25Gbps Multimode Single Fiber Bi-Directional Optical Transceiver

Parameter		Symbol	Min.	Typ.	Max.	Unit
Receiver						
Data Rate (NRZ)		B	-	1.25	-	Gbps
Optical Input Sensitivity (avg.) ^{(1) (5)}	TR13R85	P _{IN}	-	-	-16	dBm
	TR85R13	P _{IN}	-	-	-16	dBm
Saturation		-	-3	0	-	dBm
Optical Wavelength	TR13R85	λ	830	850	870	nm
	TR85R13	λ	1260	1310	1360	nm
Output Rise Time (20-80%)		t _r	-	-	250	ps
Output Fall Time (20-80%)		t _f	-	-	250	ps
Data Output ⁽⁶⁾	DC Coupled	V _{OL}	V _{CC} -1.840	-	V _{CC} -1.62	V
		V _{OH}	V _{CC} -1.045	-	V _{CC} -0.88	V
	AC Coupled (Differential)	V _I	0.6	-	1.8	V
Signal Detect Asserted (avg.)	TR13R85	P _A	-	-	-16	dBm
	TR85R13	P _A	-	-	-16	dBm
Signal Detect Deasserted (avg.)		P _D	-20	-	-	dBm
Hysteresis		P _{HYS}	-	2	-	dB
Supply Voltage		V _{CC}	3.10	3.3	3.50	V
			4.75	5.0	5.25	V
Supply Current		I _{CC}	-	-	130	mA

Note :

- (1) With 0.275 NA, 62.5/125μm fiber.
- (2) Driven with a differential signal.
- (3) Class 1 eye safe per FDA and IEC.
- (4) Eye mask diagram is compliant to ITU-T G.957 Eye Diagram.
- (5) 2⁷-1 PRBS, BER= 10⁻¹²
- (6) Compatible with PECL/LVPECL logic levels.
- (7) The transmitter output should not be viewed directly.

Absolute Maximum Ratings

Parameter		Min.	Max.	Unit
Operating Temperature	-1	-40	70	°C
	-2	-40	85	°C
Lead Soldering Limits		-	260/10	°C/sec
Supply Voltage	5V	-0.2	7	V
	3.3V	-0.2	4	V

1.25Gbps Multimode Single Fiber Bi-Directional Optical Transceiver

Ordering Information

Transmitter : 1310nm / Receiver : 850nm

T R 1 3 R 8 5 M 3 - 1 - 1 **M** **G** — RoHS

Operating Temperature Range :

1 : -40°C ~ 70°C

2 : -40°C ~ 85°C

Data Coupling & SD Output Level :

Symbol	Tx Coupling	Rx Coupling	SD
C	AC	DC	PECL
D	AC	DC	TTL
E	AC	AC	PECL
F	AC	AC	TTL
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

Supply Voltage :

5 : 5V

3 : 3.3V

Connector Type :

SC : SC Connector

FC : FC Connector

ST : ST Connector

Package Type :

R : Receptacle Type

P : Pigtail Type (Fiber Length 100cm)

1.25Gbps Multimode Single Fiber Bi-Directional Optical Transceiver

Transmitter : 850nm / Receiver : 1310nm

T R 8 5 R 1 3 M 3 - 1 - 1 **M** **G** — RoHS

Operating Temperature Range :

1 : -40°C ~ 70°C

2 : -40°C ~ 85°C

Data Coupling & SD Output Level :

Symbol	Tx Coupling	Rx Coupling	SD
C	AC	DC	PECL
D	AC	DC	TTL
E	AC	AC	PECL
F	AC	AC	TTL
G	DC	DC	PECL
H	DC	DC	TTL
I	DC	AC	PECL
J	DC	AC	TTL

Supply Voltage :

5 : 5V

3 : 3.3V

Connector Type :

SC : SC Connector

FC : FC Connector

ST : ST Connector

Package Type :


R : Receptacle Type

P : Pigtail Type (Fiber Length 100cm)

1.25Gbps Multimode Single Fiber Bi-Directional Optical Transceiver


Outline Drawing

Pigtail Type :

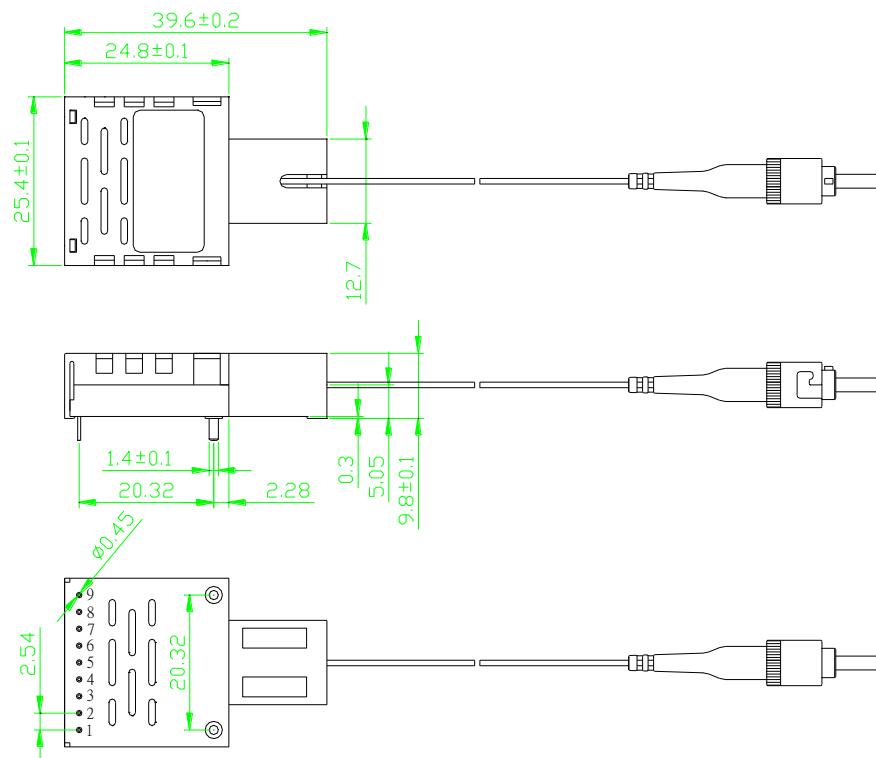

1.25Gbps Multimode Single Fiber Bi-Directional Optical Transceiver

Receptacle Type :

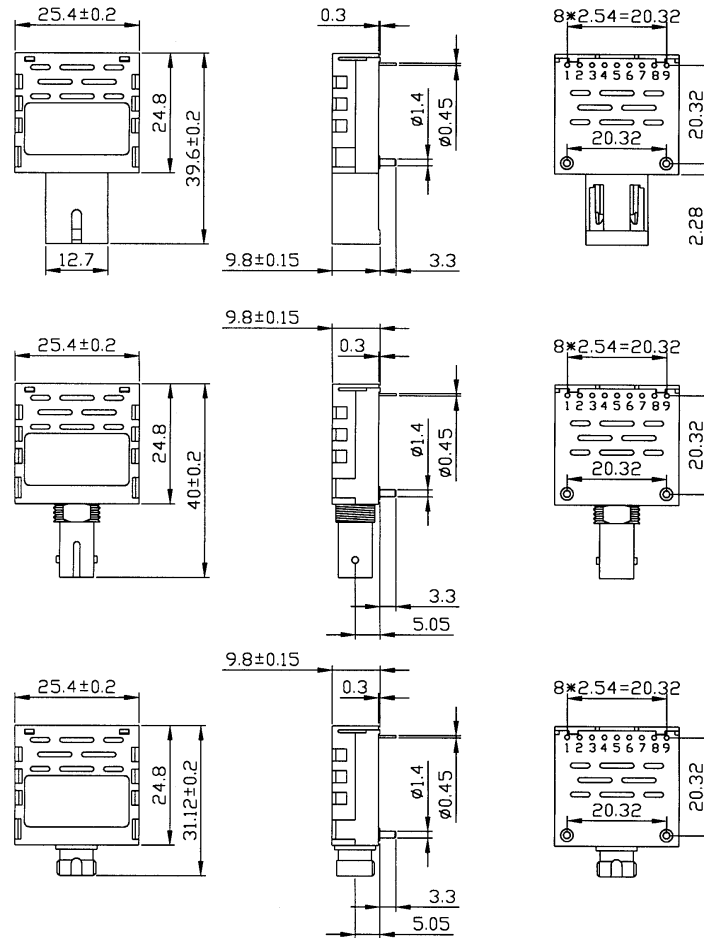

Pin No.	PIN Name	
1	V_{EER}	Rx Ground
2	RD	Rx Data Out
3	\overline{RD}	Rx Data Out (Inverted)
4	SD	Rx Signal Detect
5	V_{CCR}	Rx Power Supply
6	V_{CCT}	V_{CC} Power Supply
7	\overline{TD}	Tx Data In (Inverted)
8	TD	Tx Data In
9	V_{EET}	Tx Ground

Appointech, Inc.
 6F-2, NO.192 Tung-Kuan Rd.,
 Hsinchu, Taiwan, R.O.C.
 TEL : 886-3-573-8478
 FAX : 886-3-573-8441
 E-mail : sales@appointech.com
 http://www.appointech.com