

D1310 Fiber Fault Locator



Features

- Self-testing before first measurement
- Display event distance in meters or feet
- Event distance up to 20 Km
- Store up to 512 events
- Accuracy <2 meters, independent of fiber length
- Dead zone 10 meter
- For both single-mode and multi-mode optical fiber
- Small size, easy for field applications
- Light weight, about 0.2Kg
- Rechargeable battery, Battery-full and Battery-low indicator
- Changeable receptacle connector FC, SC, ST


Specifications

| | |
|---------------------------|---|
| Laser Source | 1310nm Laser Diode |
| Connector Type | FC, ST , SC or universal receptacle for 2.5 or1.25 mm ferrule |
| Measurement Range | 20Km |
| Dead Zone | 10M |
| Accuracy | <2M, depending on variation of index of refraction |
| Resolution | <2M |
| Display | LCD panel, Fiber Number, Fiber Fault and/or Link Distance |
| Dimension | 16x7x3 cm (measured without case) |
| Weight | <0.2Kg |
| Power | Rechargeable Lithium battery |
| Battery Life | At least 8 hours after full charge |
| Operating Temperature | -15 to 50 deg-C |
| Non-operating Temperature | -35 to 70 deg-C |
| Relative Humidity | 95% (10 to 35 deg-C), 75% (35 to 50 deg-C) |

Note: Specifications subject to change without notice.

D1310 Fiber Fault Locator



Ordering information



Connector type :
SC, FC, ST, or universal **UV** (φ 2.5mm)
 or **CC** for changeable receptacle.

Options :

- Changeable receptacle FC, SC, or ST
- Standard Multi-units Carrying Case
- Heavy-Duty Multi-units Carrying Case

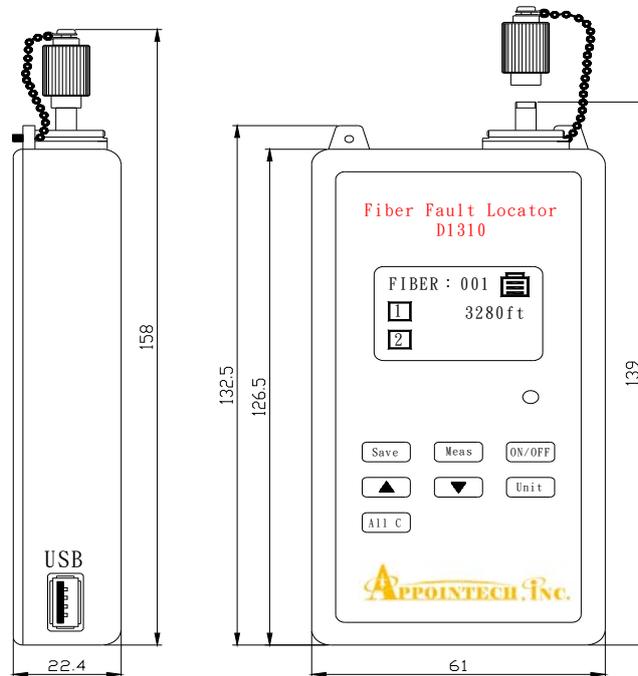

Unit:mm

D1310 Fiber Fault Locator

D1550 Fiber Fault Locator



Appointech, Inc.
6F-2, NO.192 Tung-Kuan Rd.,
Hsinchu, Taiwan, R.O.C.
TEL : 886-3-573-8478
FAX : 886-3-573-8441
E-mail : sales@appointech.com
<http://www.appointech.com>