

C1385 LED Power Meter

C1385 LED Power Meter



Features

- Calibrated outputs at LED wavelengths of 850, and 1300nm
- Calibration on-site with customer's own standard if needed
- Selection of relative/absolute power measurement
- Display measurement in dB, dBm, mW, uW, nW
- Resolution 0.01dB; absolute accuracy ± 0.25 dB
- For both multi-mode 62.5 or 50um fiber
- Small size, easy for field applications
- Light weight, about 0.2Kg
- Auto power shut-off can be disabled
- Rechargeable battery, Battery-full and Battery-low indicator
- Changeable receptacle connector FC, SC, ST

Specifications

Detector Material	InGaAs
Calibration Wavelengths	850, 1300 \pm 60nm
Power Range	+3 to -60dBm
Polarization Dependence	< 0.1 dB
Absolute Accuracy	± 0.25 dB under calibrated conditions
Linearity	± 0.05 dB
Display	LCD displays power in selected unit, wavelength. Warning symbol for low battery, Auto-Off Enable/disable
Calibration Data	Data stored in non-volatile memory
Functions	ON/OFF : power switch; Auto-Off: enable/disable switch λ -key : input wavelength selection dB/dBm-key : power unit selection, and new power reference set On-site calibration up-down keys Battery level indicator
Optical Connector Interface	FC or ST or SC or universal, adapter for other connector available
Environmental :	
Operation Temp, Humidity	-15°C to +50°C, 0-95% RH (non-condensing)
Storage Temp, Humidity	-35°C to +70°C, 0-95% RH (non-condensing)
Power	Rechargeable Lithium battery, works continuously for more than 20 hrs after 2-hrs full charge
Dimensions (Length x Width x Height)	16x7x3 cm (measured without case)
Weight (w/ batteries)	< 0.2Kg

Note: Specifications subject to change without notice.

C1385 LED Power Meter

Ordering information



C 1 3 8 5 1 for input power range +3 to -60dBm

Connector type :
SC, FC, ST, universal **UV** (\varnothing 2.5mm)
 or **CC** for changeable receptacle.

Options :

- Changeable receptacle FC, SC, or ST
- Standard Multi-units Carrying Case
- Heavy-Duty Multi-units Carrying Case

C1385 LED Power Meter

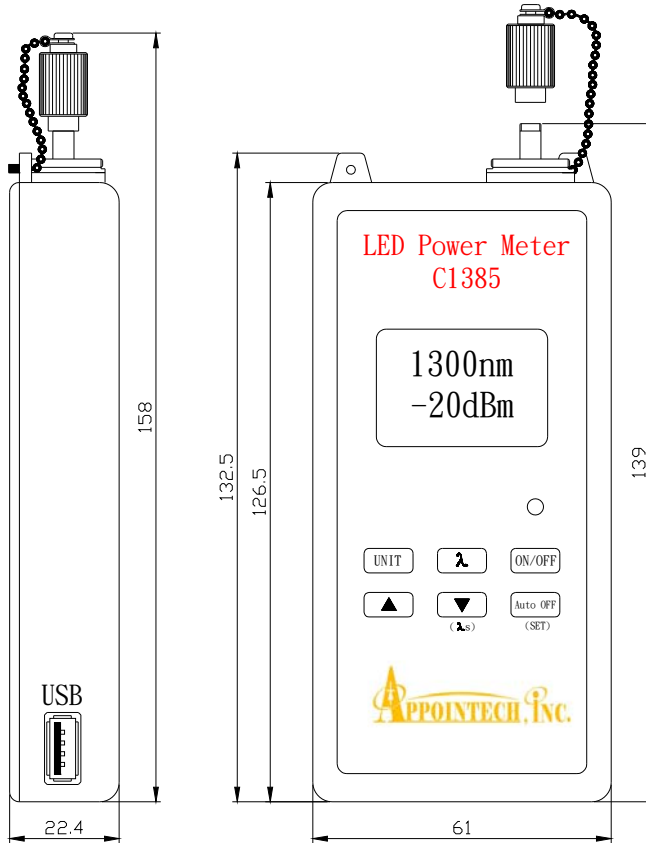

Unit:mm

C1385 LED Power Meter



C1385 LED Power Meter

Appointech, Inc.

6F-2, NO.192 Tung-Kuan Rd.,
Hsinchu, Taiwan, R.O.C.

TEL : 886-3-573-8478

FAX : 886-3-573-8441

E-mail : sales@appointech.com

<http://www.appointech.com>